

Mixed Flow Duct Fan
斜流管道风机



IPx2



Specification: 97mm, 123mm, 147mm, 196mm, 245mm, 310mm.

Ambient temperature: between -20 Celsius degree (-4 Fahrenheit degree) and 60 Celsius degree (140 Fahrenheit degree).



The unique design of the support bracket allows the motor and blade assembly to be fitted or removed without dismantling the adjacent ducting.

管口直径: 97mm, 123mm, 147mm, 196mm, 245mm, 310mm.

环境温度介于 -20摄氏度(-4华氏度)至 60摄氏度(140华氏度)之间使用。

支架采用独特的设计, 拆除电机和风叶组件时, 无需拆除相邻的管道。

External Dimensions 外形尺寸图

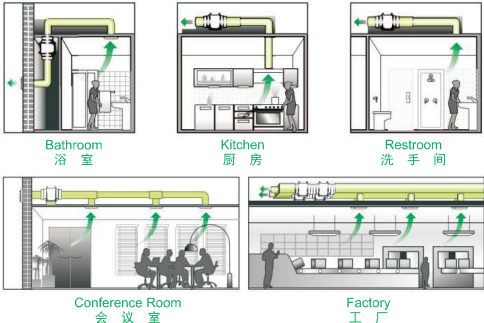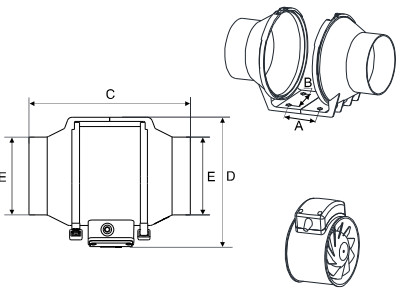

Dimension Table 尺寸表

型号 Model No.	A	B	C	D	E
DJT10-13S	78	60	241	145	97
DJT10-23S	81	60	281	220	97
DJT12-33S	81	60	281	220	123
DJT15-45S	90	74	305	245	147
DJT20-55S	91	101	310	268	196
DJT25-66S	152	110	387	340	245
DJT30-67S	182	140	450	405	310

Units 单位:mm



Mixed Flow Duct Fan
斜流管道风机

Electrical Ratings 技术参数

型号 Model No.	额定电压/ 频率/ 相数 Rated Voltage/ Frequency/ Phase	风叶直径 Blade Diameter (mm)	档位 Setting	功率 Power (W)	转速 Rotating Speed (R.P.M.)	风量 Air Volume (m³/h)	静压 Static Pressure (Pa)	噪音 Noise (dB(A))	电机绝缘等级 Insulation Class	净重 Net Weight (kg)
DJT10-13S	220V~/ 50Hz/ 1Ph	125		20	1900	140	70	36	E	1.0
DJT10-23S		154	高档 High	30	2250	205	158	50		1.7
			低档 Low	25	1700	170	125	43		
DJT12-33S		154	高档 High	38	2200	350	160	54		1.7
			低档 Low	28	1700	265	125	45		
DJT15-45S		172	高档 High	57	2500	570	280	60		2.4
			低档 Low	49	1900	450	240	52		
DJT20-55S		193	高档 High	133	2350	970	345	64		3.0
			低档 Low	98	1850	760	260	56		
DJT25-66S		250	高档 High	230	2450	1410	500	67		7.6
			低档 Low	163	2020	1080	380	61		
DJT30-67S		308	高档 High	295	2350	2180	645	69		10.3
	低档 Low		205	1880	1730	430	62			

Performance Curve 性能曲线图

A: DJT10-13S
B: DJT10-23S(低档 Low) C: DJT10-23S(高档 High)
D: DJT12-33S(低档 Low) E: DJT12-33S(高档 High)
F: DJT15-45S(低档 Low) G: DJT15-45S(高档 High)
H: DJT20-55S(低档 Low) I: DJT20-55S(高档 High)



J: DJT25-66S(低档 Low) K: DJT25-66S(高档 High)
L: DJT30-67S(低档 Low) M: DJT30-67S(高档 High)

