

Super-Slim Type Low-Noise Duct Fan (180°)

超薄型静音管道风机 (180°)



The super-slim type low-noise duct fan (180°) is an ideal equipment for ventilation in house, villas, office, conference rooms, shopping malls, hotel, restaurants and other public places. It can be efficiently used with connection to ducts for air supply and exhaust, perfectly keeping the indoor air clean and fresh.


The super-slim type low-noise duct fan inlet and outlet makes installation with ducts much more easier and more space-saving and even extremely lower noise.

This series have the high and low setting modes, which would be more convenience for the customer to choose the suitable air volume.

超薄型静音管道风机(180°)是现代居住场所必备的通风设备, 它能有效地进行送风换气, 令室内空气清新、干净, 适用于家庭、别墅、办公楼、会议室、商场、宾馆、酒楼或其它公共场所等。

超薄型静音管道风机设计进出风管是直出直入, 不需弯曲, 安装方便、外形美观, 其创新薄型设计占空间少, 噪音极低, 高静压, 检修便利。整系列超薄型静音管道风机具有强、弱档调节风量模式, 客户可根据实际需要选择适合的风量。

External Dimensions 外形尺寸图

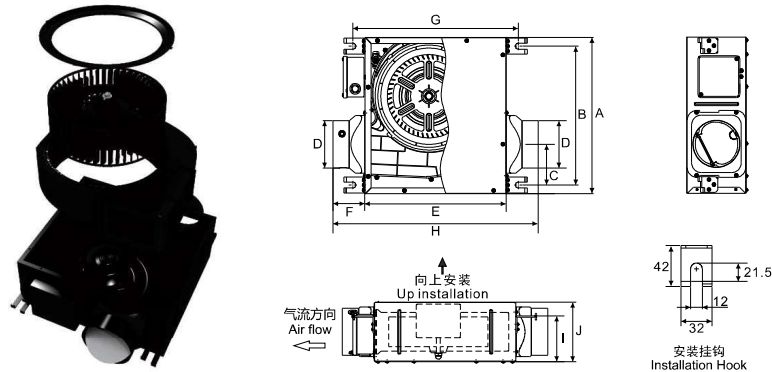

Dimension Table 尺寸表

Units 单位:mm

型号 Model No.	A	B	C	D	E	F	G	H	I	J	管口尺寸 Duct Size (mm)
DPT07-13H	295	260	100	73	275	65	324	405	72	100	Φ75
DPT10-24H	315	280	100	95	285	65	334	415	92	120	Φ100
DPT15-34H	315	280	120	148	285	65	334	415	132	170	Φ150
DPT15-45H	362	327	126	148	338	65	387	468	107	170	Φ150
DPT20-55H	445	410	146	200	465	65	512	595	158	220	Φ200
DPT20-56H	445	410	146	200	465	65	512	595	158	220	Φ200
DPT20-66H	445	410	146	200	465	65	512	595	158	220	Φ200
DPT25-66H	500	423	210	250	550	75	595	700	232	325	Φ250
DPT25-76H	500	423	210	250	550	75	595	700	232	325	Φ250

Super-Slim Type Low-Noise Duct Fan (180°)

超薄型静音管道风机 (180°)

Electrical Ratings 技术参数

型号 Model No.	额定电压/ 频率/ 相数 Rated Voltage/ Frequency/ Phase	风轮直径 Impeller Diameter (mm)	档位 Setting	功率 Power (W)	转速 Rotating Speed (R.P.M.)	风量 Air Volume (m³/h)	静压 Static Pressure (Pa)	噪音 Noise (dB/A)	电机绝缘等级 Insulation Class	净重 Net Weight (kg)
DPT07-13H	220V~ / 50Hz / 1Ph	180		25	1260	110	155	40	E	3.7
DPT10-24H		200	高档 High 低档 Low	33 30	1305 1100	210 160	160 130	48 42		4.4
DPT15-34H		200	高档 High 低档 Low	66 56	1320 1100	370 295	220 195	52 47		4.8
DPT15-45H		230	高档 High 低档 Low	107 103	1360 1170	550 415	255 225	56 53		7.2
DPT20-55H		280	高档 High 低档 Low	150 110	890 735	770 630	330 290	51 46		14.4
DPT20-56H		280	高档 High 低档 Low	210 160	1090 945	920 800	365 335	57 53		14.4
DPT20-66H		280	高档 High 低档 Low	315 270	1310 1185	1200 1000	410 390	63 60		14.4
DPT25-66H		280	高档 High 低档 Low	550 380	962 763	1500 1200	500 460	63 57		28.0
DPT25-76H		280	高档 High 低档 Low	920 680	1321 1086	2000 1600	550 520	72 67		30.0

Performance Curve 性能曲线图

- A: DPT07-13H
 B: DPT10-24H(低档 Low)
 C: DPT10-24H(高档 High)
 D: DPT15-34H(低档 Low)
 E: DPT15-34H(高档 High)
 F: DPT15-45H(低档 Low)
 G: DPT15-45H(高档 High)
 H: DPT20-55H(低档 Low)
 I: DPT20-55H(高档 High)
 J: DPT20-56H(低档 Low)
 K: DPT20-56H(高档 High)
 L: DPT20-66H(低档 Low)
 M: DPT20-66H(高档 High)
 N: DPT25-66H(低档 Low)
 O: DPT25-66H(高档 High)
 P: DPT25-76H(低档 Low)
 Q: DPT25-76H(高档 High)

