




# TTE Combo

## Universal LAN/GPRS Communication Module




### Description

TTE Combo is an universal module, that can be connected to any panel capable to transmit CID events. TTE Combo transmits those events to Ajax SP Pro server through LAN or GPRS network. TTE Combo is used to send alarm messages to monitoring center or end-user. The module is mounted in small plastic box suitable for wall mounting. It is possible to program and to control the TTE Combo module remotely via AJAX SP Pro software application.

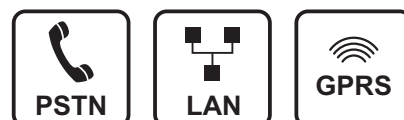

### Technical Specifications

- Power supply . . . . . 9-30V $\overline{=}$ , no tolerance
- Current Consumption:
  - Normal operation mode (Standby) . . . . 100mA
  - Maximal consumption . . . . . 200mA
- Outputs . . . . . 2, 100 mA, OC type
- Inputs . . . . . 1, Tamper/NC to GND
- Encryption . . . . . AES 128 bits
- Ethernet port . . . . . 10/100Mbps
- Antenna connector (SMA) . . . . . 50 Ohm
- GPRS working frequencies . . . . . 850/900/1800/1900MHz
- Operating temperature . . . . . -20°C - +60°C
- Dimensions . . . . . 73x108mm

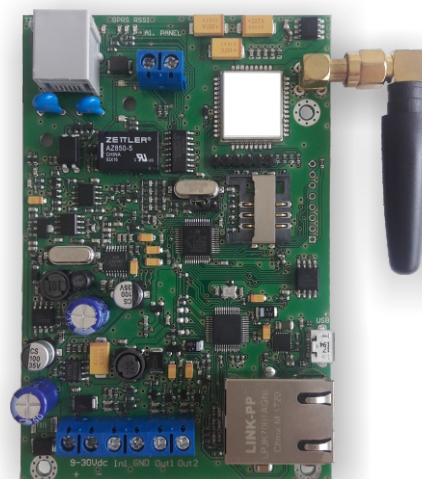

### Functional Specifications

- Compatible with control panels capable to transmit Contact ID (CID);
- Control panel communication supervision;
- 2 Communication channels – LAN and/or GPRS;
- Main and Back-up reporting channels;
- Connecting to AJAX SP PRO through IP or DNS address;
- LAN settings – Manual or Automatic (DHCP);
- Jumper for restoring of the default factory settings;
- Micro USB port for direct programming.

### Contact Information




# TTE Combo

Universal LAN/GPRS Communication Module



## Functional Diagram

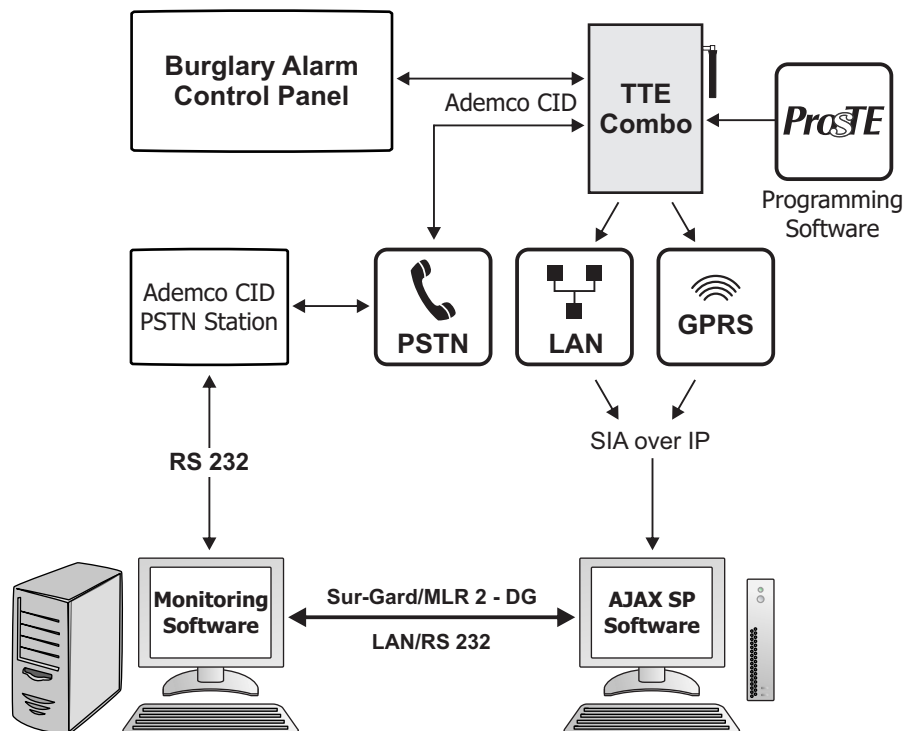

## Packing Information

- **Single packing box** - 1 unit TTE Combo, dimension 108 x 108 x 46 mm
- **Carton packing box** - 62 units TTE Combo, dimensions 490 x 357 x 220 mm.

## Compatible Product Range

- **Eclipse series** - Alarm control panels 8/ 16/ 32/ 99 zones
- **SB-U** - small universal box
- **Third party intruder alarm systems**

## Contact Information